

MYLANDS

WOOD FINISHING OIL FOR USE ON ALL INTERNAL WOODWORK

PRODUCT NAME/COLOUR	CODE	VOC LEVEL
Wood Finishing Oil	09 779 9147	580 g/l
Wood Finishing Oil Matt	09 779 9145	580 g/l
Heavy Woodfinishing Oil (Exterior Grade)	09 779 9149	580 g/l

PRODUCT DETAILS

Mylands Wood finishing Oil is a general all-purpose oil for all internal wood applications. It combines the hard wearing properties of Tung Oil with other quality oil resins.

The oil is especially suited for kitchen and bathroom worktops, tables and other furniture which is in constant use.

APPLICATION

- ◆ Always test Wood finishing Oil on an off-cut of timber or an inconspicuous area of furniture to check colour and finish is as desired before oiling the whole article.
- ◆ Mylands Wood finishing Oil may be used on new or previously finished timber.
- ◆ For previously finished timber: Remove the old finish with paint and varnish remover.
- ◆ Old oiled or waxed surfaces should be cleaned with Mylands Special De-waxing Solution or slightly abraded with fine abrasive paper or steel wool.
- ◆ The following stains are suitable under Wood finishing Oil: Light Fast Stains, Non Fade Stains, Water Based Stains, Earth Stains. Stains must be fully dry before application of the Woodfinishing Oil.
- ◆ Apply a thin first coat of Wood finishing Oil with a clean pad of white lint-free cotton cloth and leave to dry overnight. Then cut back lightly with 320 grit finishing paper or 0000 grade wire wool (for best results, use the paper first and then the wire wool) to achieve a flat surface for subsequent coats. Apply further coats in similar manner to give build and finish required.
- ◆ At least 3 -4 coats should be used on worktops to give adequate protection. If required, on decorative furniture the oiled finish may be over-waxed, but a curing time of 7 days should be allowed prior to this.

PRODUCT BENEFITS

Tough, hard-wearing finish.

Good water, heat and alcohol resistance.

Suitable for all interior woodwork.

Suitable for use on turned items.

Suitable for use on exterior woodwork (teak).

COVERAGE

On average per litre **10-12 m²** dependant on substrate absorbancy and method of application.

DRYING TIME



Touch dry
in 4 hours.



Sanding/Recoat in
12 hours (at 20°C).

CLEANING

Use White Spirit (09 899 9262).
Wash brushes immediately after use before the oil dries.

THINNING

Thinning should not be necessary, but if required use White Spirit, (09 899 9262).

STORAGE

Always replace the container lid, otherwise the oil could deteriorate.

Store at a temperature above 5°C.

MYLANDS

WOOD FINISHING OIL (CONTINUED) FOR USE ON INTERNAL WOODWORK

MAINTENANCE

Clean oiled surfaces with a damp cloth. For more soiled surfaces a small amount of liquid detergent may be added to the water.

Old or worn oiled surfaces may be refurbished by abrading the surface and applying further coats of Woodfinishing Oil as in 'Application' section.

HEALTH & SAFETY


Refer to Mylands Woodfinishing Oil MSDS before use.

Rags used for Woodfinishing Oil should not be left rolled or screwed up as they can spontaneously combust. Either spread out to dry or put in a container with water.


Tung Oil is a component of Woodfinishing Oil and is extracted from nuts and could cause an allergic reaction.

SIZES AVAILABLE

Woodfinishing Oil
available in:

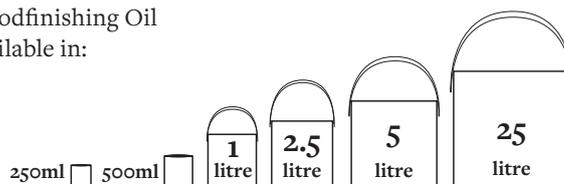

Woodfinishing Oil Matt
available in:

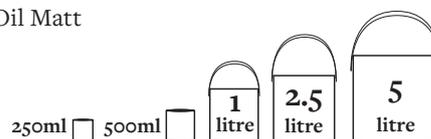

Heavy Woodfinishing Oil
(Exterior Grade) available in:

